



No. 6540K

Roller chain

Single roller chain DIN 8187. ISO R 606 B, ST 37-2.
Surface: plain.

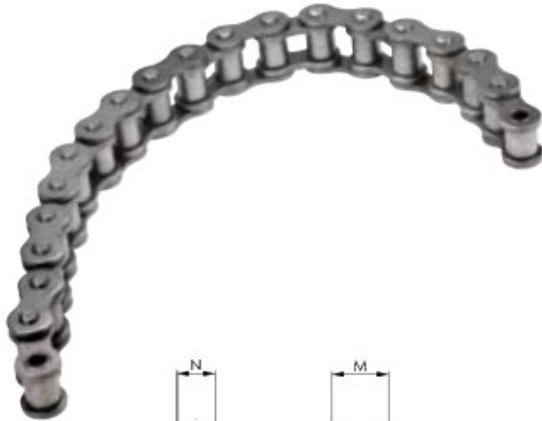

Order no.	Size	max. possible clamping force [kN]	L	M	N	Weight [g]
374736	M12	15	125	20	15	114
374744	M12	15	250	20	15	228
374751	M12	15	500	20	15	455
374769	M12	15	1000	20	15	910
374777	M16	40	125	33	21	335
374785	M16	40	250	33	21	670
374793	M16	40	500	33	21	1340
374801	M16	40	1000	33	21	2680
376673	M20	75	1000	43	25	3720
376699	M20	75	1500	43	25	5580
376715	M20	75	2000	43	25	7440
376723	M24	120	1000	55	34	7050
376749	M24	120	1500	55	34	10575
376764	M24	120	34	55	2000	14100

Application:

The individual chain lengths can be joined as required using the connecting links (No. 69540V).
The chain can be shortened to any length as required.

Advantage:

- Chain can be extended or shortened to the required length with ease
- both sides usable with counter catches or hook ends
- resistant to temperature influences and soiling
- chains are tensioned to minimise elongation.

On request:

Customised lengths available!