


# Steerable Skates ET series

## Professional class

- ▲ You can get smooth running on the i-LIFT ET series skates.
- ▲ Skates are available in two versions type A & B.
- ▲ Type A can be steerable, Type B can be laterally adjustable.
- ▲ Powder coated give a high quality durable finish.

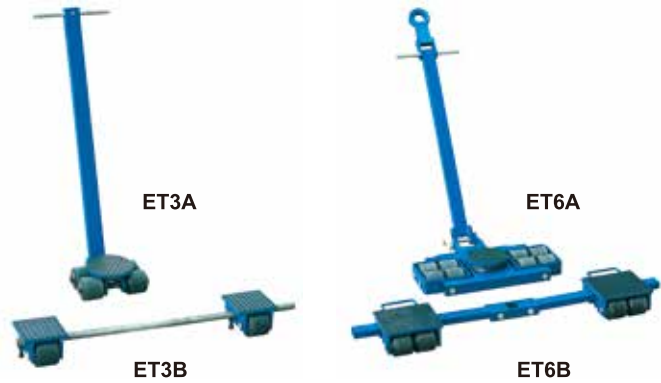

i-Lift No.		1911301	1911302	1911303	1911304	1911305
Model		ET3A	ET6A	ET9A	ET12A	ET20A
Capacity	kg(lb.)	3000(6600)	6000(13200)	9000(19800)	12000(26400)	20000(44000)
Loading Height	(mm)(in.)		110(4.4)			180(7.1)
Roller Size	(mm)(in.)		Φ85x68(3x2.7)			Φ140x64(6x2.5)
Number of Roller	(pcs)	4	8	12		16
Dia of 180° Rotating Platform	(mm)(in.)		170(7)			250(10)
Dimensions	LxW (mm)(in.)	270x230(10.6x9.1)	610x520(24x20.5)	815x600(32.1x23.6)	990x600(39x23.6)	1090x730(42.9x28.7)
Length of Handlebar (with pulling eye)	(mm)(in.)	960(37.8)		1080(42.5)		1620(63.8)
Net Weight	kg(lb.)	15(33)	45(99)	56(123.2)	73(160)	188(413.6)

i-Lift No.		1911401	1911402	1911403	1911404	1911405
Model		ET3B	ET6B	ET9B	ET12B	ET20B
Capacity	kg(lb.)	3000(6600)	6000(13200)	9000(19800)	12000(26400)	20000(44000)
Loading Height	(mm)(in.)		110(4.4)			180(7.1)
Roller Size	(mm)(in.)		Φ85x85(3x3)			Φ140x85(6x3.3)
Number of Roller	(pcs)	4	8	12		16
Dimensions of Load Bearing Area	(mm)(in.)	150x150(6x6)	200x220(8x8.8)	180x170(7.1x6.7)	200x220(8x8.8)	280x220(11x8.8)
Range of Connecting Rod Adjustable	(mm)(in.)	960(37.8)		1080(42.5)		1620(63.8)
Net Weight	kg(lb.)	16(35.2)	32(70.4)	34(74.8)	45(99)	95(209)