

208-02 2-jaw tab puller "Economy" with oscillating, height-adjustable jaws, up to 230 mm spread, 150 mm reach



DESCRIPTION

The 2-jaw puller "Economy" with oscillating and height-adjustable jaws is used for pulling bearings, gears, and discs in all common sizes for crafts, workshops, and industry. The oscillating and curved jaws adapt to any installation situation and are universally applicable due to the adjustable reach and spread.

APPLICATION AREA

For pulling off bearings, gears and pulleys

BENEFIT

- Adjustable puller jaws for individual adaptation of the reach due to multiple drilling in the puller jaws.
- Oscillating puller jaws offer a variety of adjustment options.
- Safe installation of the spindle with a rotatable spindle tip on both smooth surfaces and during centering (Switch Technology)
- Anti-slip safety (spindle neck) at the spindle head for safe working with a wrench.
- Spindle outlet for thread protection

OPERATION

- Position the puller jaws from the outside onto the part to be removed
- Swing the jaws under the component
- Manually pull the spindle to fix it in place
- Use a ratchet or a ring spanner to turn the hexagon at the spindle head until the component is loosened

MASTER DATA

| | |
|-------------------------------|--------------------------------------|
| GTIN [EAN] | 4021176432651 |
| Country of origin | DE |
| Case material | Tool steel |
| Series | 208 |
| Net weight [kg] | 2,49 kg |
| Package contents | 1 piece |
| Packaging Act | PAP 21 |
| Global sales capability given | Yes (REACH, RoHS, POP, PROP65, TSCA) |

SPARE PARTS

- 201-2-T_Crossbar
- 208-02-190-P_2 puller jaws (pair)
- 621220_Mechanical pressure spindle



APPLICATION IMAGE



DETAIL IMAGE




2-jaw tab puller "Economy" with oscillating, height-adjustable jaws, up to 230 mm spread, 150 mm reach

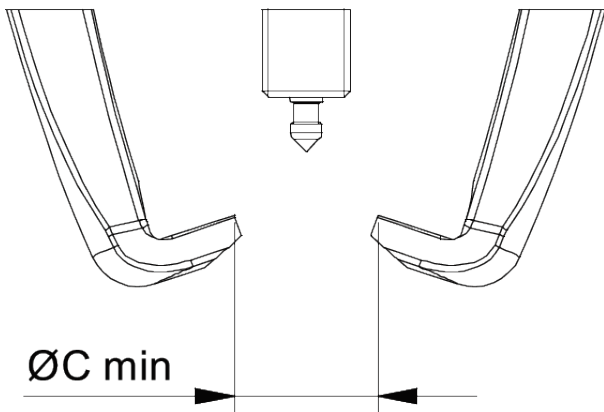


| Abbreviation | Attribut | Wert |
|--------------|---|--------|
| X | Total width [mm] | 250 mm |
| Y | Total depth [mm] | 42 mm |
| Z | Total height [mm] | 245 mm |
| A | Clamping depth outside pull-off [mm] | 150 mm |
| S1 | Width across flats [mm] | 22 mm |
| Cmin | Span outside pull-off (min.) [mm] | 0 mm |
| Cmax | Span outside pull-off (max.) [mm] | 230 mm |
| K | Hook root thickness at the tip (claw thickness K) [mm] | 4,5 mm |
| J | Hook base width (claw width J) [mm] | 20 mm |
| O | Hook base depth usable (claw depth usable O) [mm] | 20 mm |
| H | Total hook root depth (total claw depth H) [mm] | 30 mm |
| L | Total claw thickness (L+1mm) (claw distance to base surface) [mm] | 13 mm |
| Tmax | Max. torque [Nm] | 50 Nm |
| Fmax | Max. tractive force [t] | 2.5 t |
| Fmax | Max. tensile force [kN] | 25 kN |

| Abbreviation | Attribut | Wert |
|--------------|---|--------|
| X | Total width [mm] | 250 mm |
| Y | Total depth [mm] | 42 mm |
| Z | Total height [mm] | 245 mm |
| A | Clamping depth outside pull-off [mm] | 150 mm |
| S1 | Width across flats [mm] | 22 mm |
| Cmin | Span outside pull-off (min.) [mm] | 0 mm |
| Cmax | Span outside pull-off (max.) [mm] | 230 mm |
| K | Hook root thickness at the tip (claw thickness K) [mm] | 4,5 mm |
| J | Hook base width (claw width J) [mm] | 20 mm |
| O | Hook base depth usable (claw depth usable O) [mm] | 20 mm |
| H | Total hook root depth (total claw depth H) [mm] | 30 mm |
| L | Total claw thickness (L+1mm) (claw distance to base surface) [mm] | 13 mm |
| Tmax | Max. torque [Nm] | 50 Nm |
| Fmax | Max. tractive force [t] | 2.5 t |
| Fmax | Max. tensile force [kN] | 25 kN |

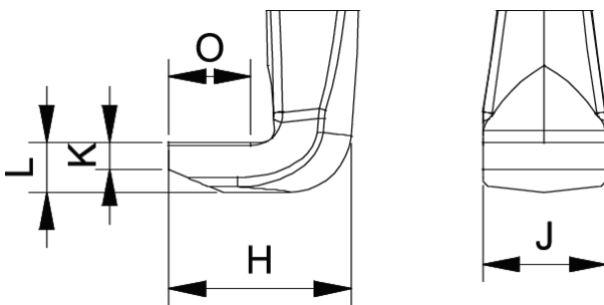

| Abbreviation | Attribut | Wert |
|--------------|--------------------------------------|--------|
| X | Total width [mm] | 250 mm |
| Y | Total depth [mm] | 42 mm |
| Z | Total height [mm] | 245 mm |
| A | Clamping depth outside pull-off [mm] | 150 mm |

| | | |
|------|---|--------|
| S1 | Width across flats [mm] | 22 mm |
| Cmin | Span outside pull-off (min.) [mm] | 0 mm |
| Cmax | Span outside pull-off (max.) [mm] | 230 mm |
| K | Hook root thickness at the tip (claw thickness K) [mm] | 4,5 mm |
| J | Hook base width (claw width J) [mm] | 20 mm |
| O | Hook base depth usable (claw depth usable O) [mm] | 20 mm |
| H | Total hook root depth (total claw depth H) [mm] | 30 mm |
| L | Total claw thickness (L+1mm) (claw distance to base surface) [mm] | 13 mm |
| Tmax | Max. torque [Nm] | 50 Nm |
| Fmax | Max. tractive force [t] | 2,5 t |
| Fmax | Max. tensile force [kN] | 25 kN |

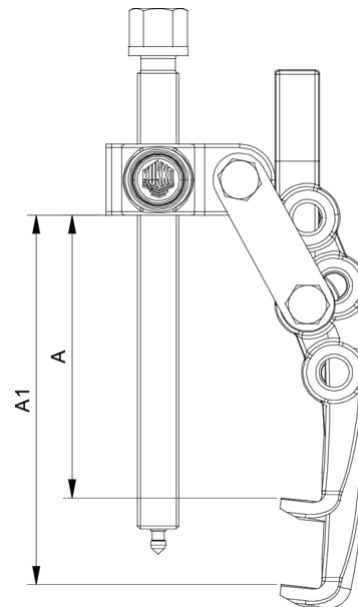

| Abbreviation | Attribut | Wert |
|--------------|---|--------|
| X | Total width [mm] | 250 mm |
| Y | Total depth [mm] | 42 mm |
| Z | Total height [mm] | 245 mm |
| A | Clamping depth outside pull-off [mm] | 150 mm |
| S1 | Width across flats [mm] | 22 mm |
| Cmin | Span outside pull-off (min.) [mm] | 0 mm |
| Cmax | Span outside pull-off (max.) [mm] | 230 mm |
| K | Hook root thickness at the tip (claw thickness K) [mm] | 4,5 mm |
| J | Hook base width (claw width J) [mm] | 20 mm |
| O | Hook base depth usable (claw depth usable O) [mm] | 20 mm |
| H | Total hook root depth (total claw depth H) [mm] | 30 mm |
| L | Total claw thickness (L+1mm) (claw distance to base surface) [mm] | 13 mm |
| Tmax | Max. torque [Nm] | 50 Nm |
| Fmax | Max. tractive force [t] | 2,5 t |
| Fmax | Max. tensile force [kN] | 25 kN |