

# 208-0 2-jaw tab puller with oscillating, reversible jaws, adjustable reach, up to 100 mm spread, 50 mm reach



## DESCRIPTION

The 2-jaw puller with oscillating, reversible jaws and adjustable reach is used for centric pulling of bearings, gears, and discs in all common sizes for crafts, workshops, and industry. This allows for any component seated on a shaft and freely accessible from the outside to be removed. The jaws can be used on both sides. Depending on the design, the claw shape varies.

## APPLICATION AREA

For centric extraction of bearings, gears and pulleys

## BENEFIT

- Adjustable puller jaws for individual adaptation of the reach due to multiple drilling in the puller jaws.
- Oscillating puller jaws offer a variety of adjustment options.
- Puller jaws with different claw shapes for flexible integration
- Claw end with slot provides support for screw for additional support during removal
- Anti-slip safety (spindle neck) at the spindle head for safe working with wrench.
- Spindle outlet to protect the thread

## OPERATION

- Position the puller jaws from the outside onto the part to be removed
- Swing the jaws under the component
- Manually pull the spindle to fix it in place
- Use a ratchet or a ring spanner to turn the hexagon at the spindle head until the component is loosened

## MASTER DATA

GTIN [EAN]	4021176432248
Country of origin	DE
Case material	Tool steel
Series	208
Net weight [kg]	0,5 kg
Package contents	1 piece
Packaging Act	PAP 21
Global sales capability given	Yes (REACH, RoHS, POP, PROP65, TSCA)

## SPARE PARTS

- 208-0-100-P\_2 jaws (pair)
- 41-0-T\_Crossbar
- 610110\_Mechanical pressure spindle



APPLICATION IMAGE



DETAIL IMAGE




# 2-jaw tab puller with oscillating, reversible jaws, adjustable reach, up to 100 mm spread, 50 mm reach

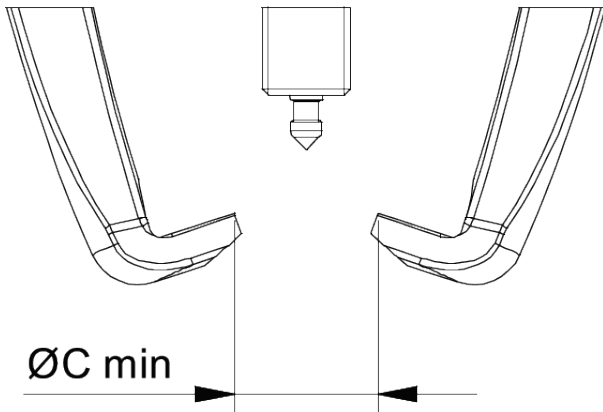


Abbreviation	Attribut	Wert
X	Total width [mm]	122 mm
Y	Total depth [mm]	20 mm
Z	Total height [mm]	75 mm
A	Clamping depth outside pull-off [mm]	50 mm
S1	Width across flats [mm]	13 mm
Cmin	Span outside pull-off (min.) [mm]	12 mm
Cmax	Span outside pull-off (max.) [mm]	100 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	5 mm
J	Hook base width (claw width J) [mm]	10 mm
O	Hook base depth usable (claw depth usable O) [mm]	9 mm
H	Total hook root depth (total claw depth H) [mm]	20 mm
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]	5 mm
Tmax	Max. torque [Nm]	20 Nm
Fmax	Max. tractive force [t]	1 t
Fmax	Max. tensile force [kN]	10 kN

Abbreviation	Attribut	Wert
X	Total width [mm]	122 mm
Y	Total depth [mm]	20 mm
Z	Total height [mm]	75 mm
A	Clamping depth outside pull-off [mm]	50 mm
S1	Width across flats [mm]	13 mm
Cmin	Span outside pull-off (min.) [mm]	12 mm
Cmax	Span outside pull-off (max.) [mm]	100 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	5 mm
J	Hook base width (claw width J) [mm]	10 mm
O	Hook base depth usable (claw depth usable O) [mm]	9 mm
H	Total hook root depth (total claw depth H) [mm]	20 mm
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]	5 mm
Tmax	Max. torque [Nm]	20 Nm
Fmax	Max. tractive force [t]	1 t
Fmax	Max. tensile force [kN]	10 kN

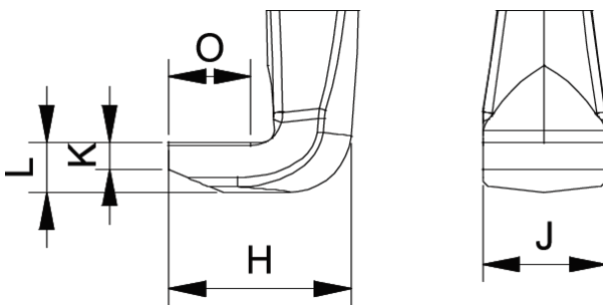


Abbreviation	Attribut	Wert
X	Total width [mm]	122 mm
Y	Total depth [mm]	20 mm
Z	Total height [mm]	75 mm
A	Clamping depth outside pull-off [mm]	50 mm

S1	Width across flats [mm]	13 mm
Cmin	Span outside pull-off (min.) [mm]	12 mm
Cmax	Span outside pull-off (max.) [mm]	100 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	5 mm
J	Hook base width (claw width J) [mm]	10 mm
O	Hook base depth usable (claw depth usable O) [mm]	9 mm
H	Total hook root depth (total claw depth H) [mm]	20 mm
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]	5 mm
Tmax	Max. torque [Nm]	20 Nm
Fmax	Max. tractive force [t]	1 t
Fmax	Max. tensile force [kN]	10 kN

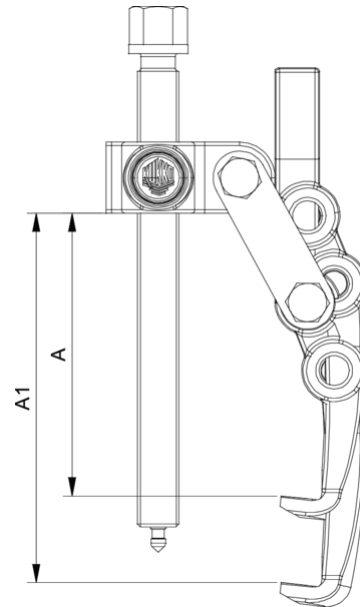

Abbreviation	Attribut	Wert
X	Total width [mm]	122 mm
Y	Total depth [mm]	20 mm
Z	Total height [mm]	75 mm
A	Clamping depth outside pull-off [mm]	50 mm
S1	Width across flats [mm]	13 mm
Cmin	Span outside pull-off (min.) [mm]	12 mm
Cmax	Span outside pull-off (max.) [mm]	100 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	5 mm
J	Hook base width (claw width J) [mm]	10 mm
O	Hook base depth usable (claw depth usable O) [mm]	9 mm
H	Total hook root depth (total claw depth H) [mm]	20 mm
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]	5 mm
Tmax	Max. torque [Nm]	20 Nm
Fmax	Max. tractive force [t]	1 t
Fmax	Max. tensile force [kN]	10 kN

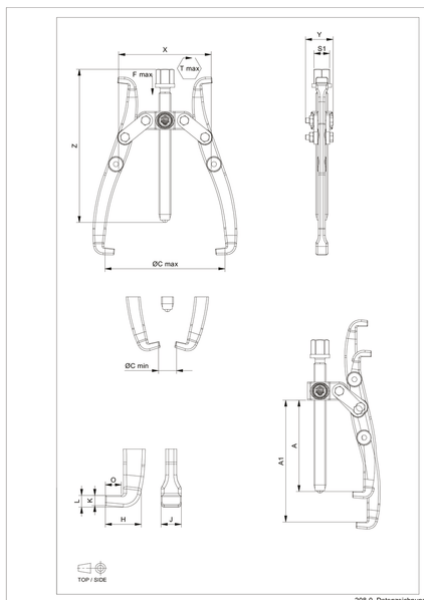

Abbreviation	Attribut	Wert
X	Total width [mm]	122 mm
Y	Total depth [mm]	20 mm
Z	Total height [mm]	75 mm
A	Clamping depth outside pull-off [mm]	50 mm
S1	Width across flats [mm]	13 mm
Cmin	Span outside pull-off (min.) [mm]	12 mm
Cmax	Span outside pull-off (max.) [mm]	100 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	5 mm

J	Hook base width (claw width J) [mm]	10 mm
O	Hook base depth usable (claw depth usable O) [mm]	9 mm
H	Total hook root depth (total claw depth H) [mm]	20 mm
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]	5 mm
Tmax	Max. torque [Nm]	20 Nm
Fmax	Max. tractive force [t]	1 t
Fmax	Max. tensile force [kN]	10 kN