

21-8 2-jaw internal extractor with spread 56 mm - 70 mm, 100 mm insertion depth



APPLICATION IMAGE



DESCRIPTION

The internal extractors of series 21 are used for extracting internal bearings, bearing outer rings, and sockets in trade, workshops, and industry. The multi-shelled design of the internal extractors with their extra-large gripping edges allows for the secure extraction of internal parts. Series 21 impresses with its compatibility and application variety. Depending on the application, there are numerous variants of the optionally 2-jaw or 3-jaw internal extractors. They are used either together with counter stays or with sliding hammers.

APPLICATION AREA

For extracting internal bearings, bearing outer rings and bushes

BENEFIT

- The robust construction and built-in spindle stop not only ensure strong but also safe work.
- Due to the extraordinary clamping force and the mechanical spindle, even bearings that are closely seated on the back wall are securely and quickly removed.
- The design of bearings or inner rings that form a blind hole ensures a secure grip during mounting and turning out.
- The thread adapters for internal extractors are included with the counter stays and sliding hammers.

OPERATION

- Determine the inner diameter of the ball bearing and select the appropriate internal puller
- Insert the internal puller into the hole and tighten the locking nut
- If a support surface is available, choose the counter stay; otherwise, select the sliding hammer

Operation with counter stay: Support the counter stay on the housing and screw it onto the wedge spindle of the internal puller

- Hold the handle of the counter stay and safely pull out the bearing by tightening the nut
- Retighten the locking nut while pulling out

Operation with sliding hammer: Screw the sliding hammer rod onto the wedge spindle of the internal puller

- Use the sliding hammer with a striking motion to pull out the bearing


MASTER DATA

| | |
|-------------------------------|--------------------------------------|
| GTIN [EAN] | 4021176011726 |
| Country of origin | DE |
| Case material | Tool steel |
| Series | 21 |
| Net weight [kg] | 1,43 kg |
| Package contents | 1 piece |
| Packaging Act | PAP 21 |
| Global sales capability given | Yes (REACH, RoHS, POP, PROP65, TSCA) |

SUITABLE FOR

- 22-0-17 Sliding Hammer Device with 1.7 kg Impact Weight
- 22-2_Counter Stay
- 22-3_Counter Stay

2-jaw internal extractor with spread 56 mm - 70 mm, 100 mm insertion depth

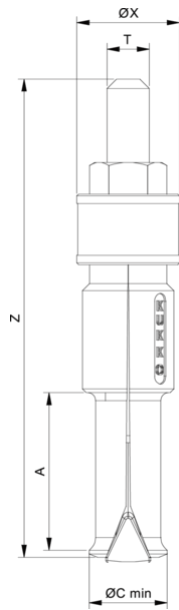

| Abbreviation | Attribut | Wert |
|--------------|-------------------------------------|---------|
| Z | Total height [mm] | 180 mm |
| S1 | Width across flats [mm] | 32 mm |
| Emin | Span inside pull-out (min.) [mm] | 56 mm |
| Emax | Span inside pull-out (max.) [mm] | 70 mm |
| X | Diameter of the extractor [mm] | 45 mm |
| T | Mounting thread [nominal dimension] | 15-16 G |

| Abbreviation | Attribut | Wert |
|--------------|-------------------------------------|---------|
| Z | Total height [mm] | 180 mm |
| S1 | Width across flats [mm] | 32 mm |
| Emin | Span inside pull-out (min.) [mm] | 56 mm |
| Emax | Span inside pull-out (max.) [mm] | 70 mm |
| X | Diameter of the extractor [mm] | 45 mm |
| T | Mounting thread [nominal dimension] | 15-16 G |