

# 21-5-E Segment internal extractor with spread 34 mm - 48 mm, 73 mm insertion depth



APPLICATION IMAGE



DETAIL IMAGE



## DESCRIPTION

The segment internal extractors of the 21-E series with 15-16 Gang thread are used for extracting flush-mounted bearings, outer bearing rings, sockets, and seals in crafts, workshops, and industry. The segmented design with extra fine gripping edges allows safe extraction of flush-mounted parts. The 21 series impresses with its compatibility and application diversity. Depending on the application, there are numerous variants of the segment internal extractors. They are used either together with counter stays or with sliding hammers.

## APPLICATION AREA

For extracting flat bearings, bearing outer rings and bushes

## BENEFIT

- Due to its segmentation and fine spindle design, the segment puller is ideal for precise and gentle work.
- The mechanical spindle extracts bearings that are tightly seated on the back wall safely and quickly.
- The shaping ensures a secure grip when seating and swiveling for bearings or inner rings that form a blind hole.
- The thread adapters for internal extractors are included in the delivery of the counter stays and sliding hammers.

## OPERATION

- Determine the inner diameter of the ball bearing and select the appropriate internal puller
- Insert the internal puller into the hole and tighten the locking nut
- If a support surface is available, choose the counter stay; otherwise, select the sliding hammer

Operation with counter stay: Support the counter stay on the housing and screw it onto the wedge spindle of the internal puller

- Hold the handle of the counter stay and safely pull out the bearing by tightening the nut
- Retighten the locking nut while pulling out

Operation with sliding hammer: Screw the sliding hammer rod onto the wedge spindle of the internal puller

- Use the sliding hammer with a striking motion to pull out the bearing


## MASTER DATA

GTIN [EAN]	4021176924071
Country of origin	DE
Case material	Tool steel
Series	21-E
Net weight [kg]	0,215 kg
Package contents	1 piece
Packaging Act	PAP 21
Global sales capability given	Yes (REACH, RoHS, POP, PROP65, TSCA)

## SUITABLE FOR

- 22-0-17 Sliding Hammer Device with 1.7 kg Impact Weight
- 22-2\_Counter Stay

# Segment internal extractor with spread 34 mm - 48 mm, 73 mm insertion depth

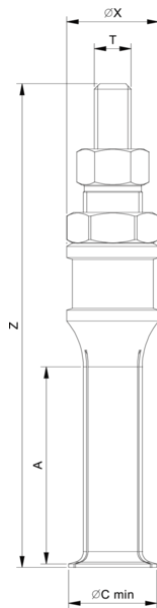

Abbreviation	Attribut	Wert
Z	Total height [mm]	150 mm
S1	Width across flats [mm]	19 mm
S2	Width across flats [mm]	24 mm
Emin	Span inside pull-out (min.) [mm]	34 mm
Emax	Span inside pull-out (max.) [mm]	48 mm
X	Diameter of the extractor [mm]	26 mm
T	Mounting thread [nominal dimension]	15-16 Gang

Abbreviation	Attribut	Wert
Z	Total height [mm]	150 mm
S1	Width across flats [mm]	19 mm
S2	Width across flats [mm]	24 mm
Emin	Span inside pull-out (min.) [mm]	34 mm
Emax	Span inside pull-out (max.) [mm]	48 mm
X	Diameter of the extractor [mm]	26 mm
T	Mounting thread [nominal dimension]	15-16 Gang