

## Insulation sleeves




- ▶ For non-insulated tabs
- ▶ Perfectly-matched to the different versions

### Characteristics

- For post-insulation of crimped non-insulated receptacles

### Material

- PA / PE / PVC

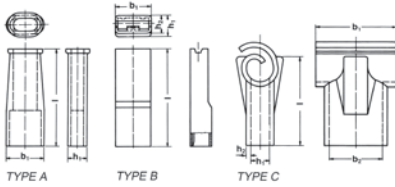

Nominal cross section mm <sup>2</sup>	Nominal size to DIN	Part No.	Colour	Typ	Dimension mm			Insulation material	for item	Weight/pcs. ~kg	Packing unit/pcs
					b1	l	h1				
0.5 - 1	2.8	<b>2755</b>	□	A	5.0	20.0	3.5	PE	18251,18251A, 18201A	0.015	100
0.5 - 1.5	4.8	<b>2760</b>	□	A	7.0	20.0	4.0	PE	18202,18203	0.015	100



# Electrical connection systems

Cable connections, insulated and non insulated

## Insulation sleeves

Nominal cross section mm <sup>2</sup>	Nominal size to DIN	Part No.	Colour	Typ	Dimension mm			Insulation material	for item	Weight/pcs. ~kg	Packing unit/pcs
					b1	l	h1				
0.5 - 2.5	6.3	<b>2770</b>	<input type="checkbox"/>	A	12.5	23.0	8.5	PE	1720,1730	0.035	100
		<b>2775</b>	<input type="checkbox"/>	A	9.5	25.0	5.0	PE	1820,1830	0.030	100
0.5 - 4		<b>2780</b>	<input type="checkbox"/>	A	9.5	25.0	6.0	PE	1720,1730, 1820,1830	0.030	100
0.5 - 6		<b>2785</b>	<input type="checkbox"/>	B	9.2	24.5	5.6	PA	1720,1730,1750, 2720,2730,2750	0.055	100
		<b>2790</b>	<input type="checkbox"/>	C	13.5	15.0	3.1	PVC	3720,3725, 3735	0.060	100