


Work Deck


Ultra-strong floor tile system




- Exceptionally robust and durable interlocking floor tile system.
- Ideal for heavy-duty industrial environments.
- Makes light work of withstanding the weight of pallet trucks and trolleys.
- Open grid design captures debris and provides drainage for spilt fluids, for a dry, clean top standing surface.
- Vibrant colours to enhance workplace floors and increase safety underfoot.

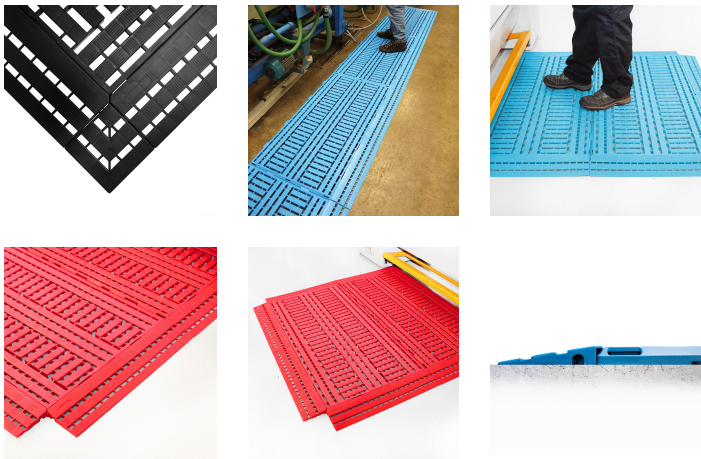


Styles Available




Red



Green



Blue



Black

| Part Number | Size | Colour | Weight (kg) |
|-------------|-----------------|--------|-------------|
| WD010001 | 0.6 m x 1.2 m | Black | 3.45 |
| WD010002 | 0.6 m x 0.12 m | Black | 0.3 |
| WD010003 | 112 mm x 112 mm | Black | 0.05 |
| WD020001 | 0.6 m x 1.2 m | Blue | 3.45 |
| WD020002 | 0.6 m x 0.12 m | Blue | 0.3 |
| WD020003 | 112 mm x 112 mm | Blue | 0.05 |
| WD040001 | 0.6 m x 1.2 m | Green | 3.45 |
| WD040002 | 0.6 m x 0.12 m | Green | 0.3 |
| WD040003 | 112 mm x 112 mm | Green | 0.05 |
| WD170001 | 0.6 m x 1.2 m | Orange | 3.45 |
| WD170002 | 0.6 m x 0.12 m | Orange | 0.3 |
| WD170003 | 112 mm x 112 mm | Orange | 0.05 |

| Material | LDPE |
|-----------------------------------|--|
| Surface Finish | Grid design |
| Product Height | 25 mm |
| Min. Operating Temperature | -10°C |
| Max. Operating Temperature | +60°C |
| Environmental Resistance | Suitable for wet and dry environments, indoors or outdoors |
| Installation Method | Loose lay interlocking tiles |
| Accessories | Edges and corners |
| COO (Country of Origin) | CN |

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)1788 228 555 or email sales@cobaeurope.com

www.cobaeurope.com