




COBAstat®

Comfortable anti-static mat for dry environments



- Comfortable and durable floor mat protects operatives from static build-up.
- ESD version of our popular Orthomat® anti-fatigue range.
- Grounded via a 10 mm male stud fitted to the mat.
- Maximum performance when used with grounding wire.
- Available as a handy COBAstat® Floor Kit with accessories provided.
- Tested to EN14041 resistance requirements.
- Rv: $1.1 \times 10^7 \Omega$

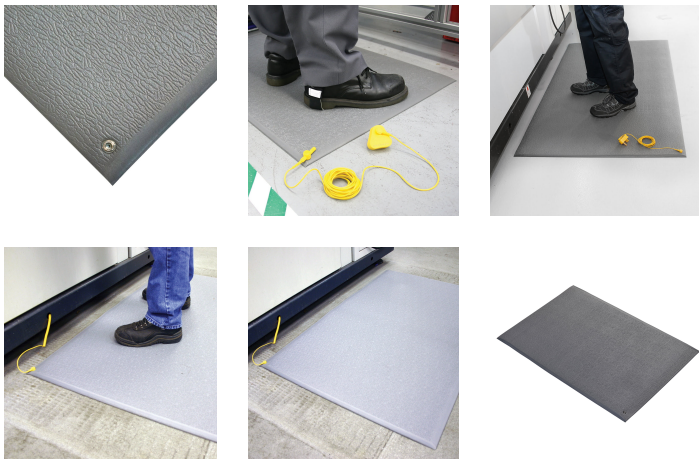

Parts

| Part Number | Size | Colour | Weight (kg) |
|-------------|--|--------|-------------|
| AS060001 | 0.6 m x 0.9 m | Grey | 2 |
| AS060002 | 0.9 m x 1.5 m | Grey | 4.5 |
| AS060003 | | Grey | |
| AS060003C | 0.9 m x per linear metre (max. 18.3 m) | Grey | 2 |

Technical Specifications

| | |
|-----------------------------------|---|
| Material | Closed cell PVC foam |
| Surface Finish | Pebble |
| Product Height | 9 mm |
| Min. Operating Temperature | 0°C |
| Max. Operating Temperature | +60°C |
| Resistance to Chemicals | PVC is resistant to many different chemicals, alkalis and general industrial chemicals. PVC resists alcohols, aliphatic hydrocarbons, oils, weak acids, strong mineral acids and alkalis. PVC resists oil and grease if properly cleaned. PVC does not resist |

organic solvents, ketones, esters and aromatic hydrocarbons. Please contact us for more specific details

| | |
|---------------------------------|---|
| Environmental Resistance | Suitable for dry indoor environments |
| Typical Applications | Around machinery where static build up is common. |
| Installation Method | Loose lay |
| Accessories | ESD kits and accessories available |
| Cleaning Method | Brush or mop the top surface |
| COO (Country of Origin) | CN |

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)1788 228 555 or email sales@cobaeurope.com

www.cobaeurope.com