


Product image



Drawing

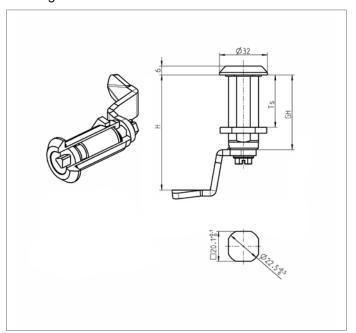

Key Features

▶ This product is a modular component of a UL-certified closure.

Properties	
O-ring position	Hub
Cap dimension L	
Number of possible locking points	1 point; 2 points; 3 point
Material of the module	Zinc die
Surface of the module	raw
For length of housing (GH)	30.0 mm

Properties	
Parts list	Adapter, Zinc die raw
	Locking screw M6 x 20, Steel zinc-plated
	O-ring, Perbunan black

The above information is given to the best of our knowledge. The tests are carried out under laboratory conditions and therefore have the character of a general recommendation. The suitability of our product for the respective application must, if necessary, be checked and verified by our own tests "under original conditions".