


The lifting bags **ZP 12** have the same principle of use as the basic lifting bags **ZP 8**. Due to the high-strength material, they are designed to use higher operating pressure and therefore they can produce greater lifting force. The basic series consists of six sizes with lifting force from 8 to 53 tons.

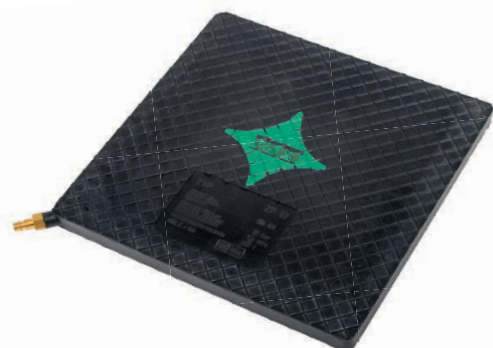

Lifting Bags ZP-12 bar

Type		ZP 8	ZP 13	ZP 19	ZP 28	ZP 40	ZP 53
Part-No.		1806	1807	1808	1809	1810	1811
Max. lifting capacity	kN	80	130	190	280	400	530
Max. lifting height	mm	170	210	260	300	360	400
Dimensions	mm	270 x 270	340 x 340	420 x 420	510 x 510	600 x 600	690 x 690
Insertion height	mm	27	27	27	27	27	27
Air requirement at 12 bar	l	58	190	280	420	560	760
Operating pressure	bar	12,0	12,0	12,0	12,0	12,0	12,0
Weight	kg	2	3,2	4,9	7,6	10,5	13,8

Accessories

Part-No. Description

50419 Inflation hose with quick couplings, 3 m


50422 Inflation hose with quick coupling and nipple, 5 m

50437 Inflation hose with quick coupling and nipple, 10 m

2134 Safety and control gauge 12 bar-ZP 12

2164 Double safety and control gauge 12 bar-2 ZP 12

2172 Pressure reducer 200/8 bar



2173 Pressure reducer 300/12 bar



50152 Cylinder 7 l



2034 Stopcock with hose

