





Crane scale



SG.0.CS

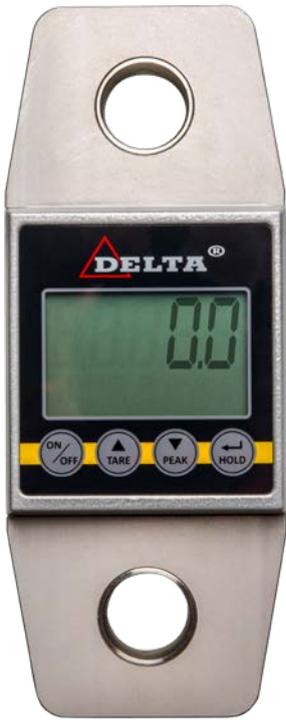

SG.0.CS.RC

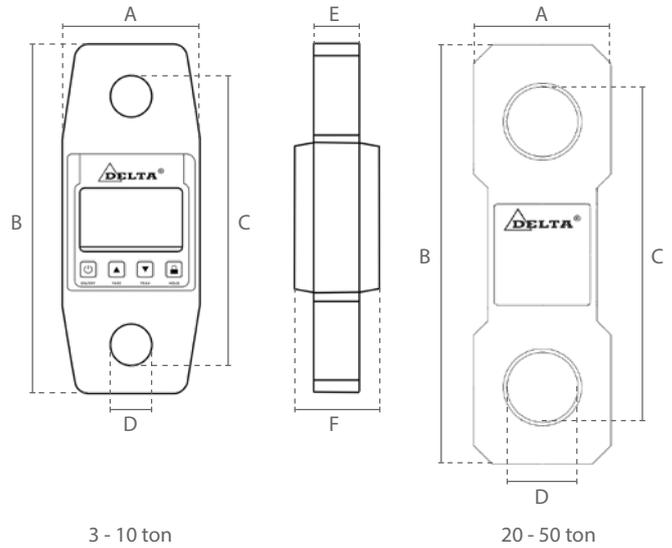

3 - 10 ton

Features

- » Compact housing with backlit display and strengthened load area.
- » With overload alarm.
- » Power supply SG.0.CS.RC (scale): Rechargeable lithium battery. Capacity 3000mAh (26 hours of operation).
- » Power supply SG.0.CS.RC (remote): Rechargeable lithium battery.
- » Power supply SG.0.CS: 3x AA batteries (not included).
- » Supplied with calibration report.
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.

Specifications							
Article code		Capacity	Minimum load	Sensitivity	Net weight	with case	Suitable shackle
with wireless indicator	without wireless indicator	ton	kg	kg	kg	kg	DELTA LOCK® ton
SG.0.CS.03.RC	SG.0.CS.03	3,000	18	1	1,7	3,3	4,750
SG.0.CS.05.RC	SG.0.CS.05	5,000	30	2	3,4	4,9	6,500
SG.0.CS.10.RC	SG.0.CS.10	10,000	50	5	6,8	8,3	12,000
SG.0.CS.20.RC	-	20,000	200	10	12,8	-	25,000
SG.0.CS.30.RC	-	30,000	200	10	15,4	-	35,000
SG.0.CS.50.RC	-	50,000	400	20	39,5	-	55,000

Specifications	
Accuracy	< ± 0.1%
Housing protection	IP 54
Operating temperature	-10°C - +40°C
Range in open space	50 m

Dimensions (mm)							
Capacity	A	B	C	D	E	F	
3,000	87	231	181	23	30	58	
5,000	87	231	189	29	30	58	
10,000	87	281	223	36	48	74	
20,000	116	360	288	60	60	-	
30,000	126	366	292	60	62	-	
50,000	180	500	392	72	70	-	