

Standard series    Ø max 1/2" - up to 20 m length  
 Ø max 3/8" - up to 25 m length

Automatic rewind, spring-driven hose reel, **standard series**, in painted steel or in stainless steel AISI 304, suitable for hoses of max 20 m length (Ø hose 1/2") or max 25 m length (Ø hose 3/8").

The wetted parts of the painted steel models on demand can also be replaced by stainless steel parts.

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water.

Please see catalogue pages 164 and 165 for the selection of the required hoses.

On demand the hose reels can also be supplied with a **spring brake kit**; please add suffix **"/HB"** to the article number (f. ex. 37115/HB)




Art.no. **39535**  
 Art.no. **39502**



Art.no. **39600**  
 Art.no. **39601**

Hose Reels

  
 On demand the stainless steel hose reels can also be supplied in accordance with directive ATEX 2014/34/EU - group II - category 2.

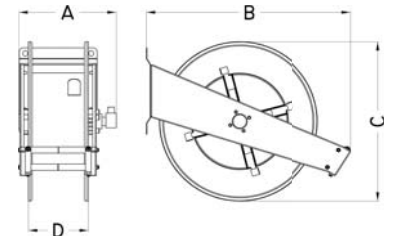

Art.no.	Material	Max working pressure	Connection threads IN - OUT	Internal diameter swivel joint	Max diameter hose	Max length hose	Suitable pivoting wall bracket	Included swivel joint	Dimensions (A-B-C) (mm)	Spool width (D)	Weight
<b>37115</b>	Painted steel	600 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	15 m	39535	9951	215x570x430	120 mm	14 Kg
<b>37120</b>					1/2"	20 m	39502		245x570x430	150 mm	18 Kg
<b>37125</b>					3/8"	25 m	39502		245x570x430	150 mm	19 Kg
<b>38200</b>	Stainless steel AISI 304	200 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	15 m	39600	9968	215x570x430	120 mm	14 Kg
<b>38210</b>					3/8"	25 m	39601		245x570x430	150 mm	19 Kg
<b>38300</b>					1/2"	20 m	39601		245x570x430	150 mm	18 Kg