

Automatic rewind, spring-driven hose reel, **adjustable arms series**, in painted steel or in stainless steel AISI 304, suitable for hoses of max 25 m length and max diameter of 1/2". The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water.

The wetted parts of the painted steel models on demand can also be replaced by stainless steel parts .

Please see catalogue pages 164 and 165 for the selection of the required hoses.


On demand the hose reels can also be supplied with a **spring brake kit**; please add suffix **"/HB"** to the article number (f. ex. 37114/HB)



Art.no. **39535**  
Art.no. **39502**



Art.no. **39600**  
Art.no. **39601**

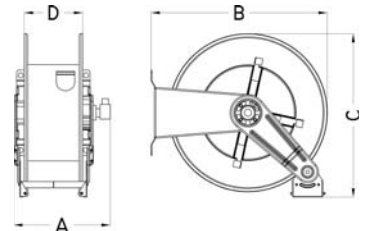

  
On demand the stainless steel hose reels can also be supplied in accordance with directive ATEX 2014/34/EU - group II - category 2.

Art.no.	Material	Max working pressure	Connection threads IN - OUT	Internal diameter swivel joint	Max diameter hose	Max length hose 3/8" - 1/2"	Suitable pivoting wall bracket	Included swivel joint	Dimensions (A-B-C) (mm)	Spool width (D)	Weight		
<b>37115B</b>	Painted steel	600 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	15 m	39535	9951	240x560x450	120 mm	12 kg		
<b>37114</b>						20 m -15 m						15 kg	
<b>37120B</b>						25 m -20 m	39502				270x560x450	150 mm	16 kg
<b>37125B</b>						25 m					303x560x450	200 mm	19 kg
<b>37118</b>	Stainless steel AISI 304	200 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	15 m	39600	9968	240x560x450	120 mm	12 kg		
<b>37130</b>						20 m -15 m						15 kg	
<b>37157</b>						25 m -20 m	39601				270x560x450	150 mm	16 kg
<b>37119</b>						25 m					303x560x450	200 mm	19 kg
<b>37140</b>						25 m							
<b>37153</b>													