

Automatic rewind, spring-driven hose reel, **adjustable arms series**, in painted steel or in stainless steel AISI 304, suitable for hoses of max 40 m length (\varnothing hose max.1/2").

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water. The wetted parts of the painted steel models on demand can also be replaced by stainless steel parts .

Please see catalogue pages 164 and 165 for the selection of the required hoses.

On demand the hose reels can also be supplied with a **spring brake kit**; please add suffix **"/HB"** to the article number (f. ex. 36470/HB)




Art.no. **39502**



Art.no. **39601**



On demand the stainless steel hose reels can also be supplied in accordance with directive ATEX 2014/34/EU – group II – category 2.

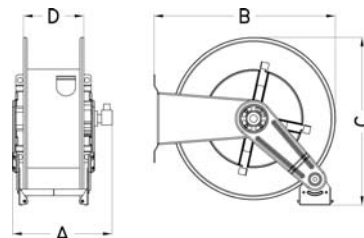

| Art.no. | Material | Max working pressure | Connection threads IN - OUT | Internal diameter swivel joint | Max diameter hose | Max length hose | Suitable pivoting wall bracket | Included swivel joint | Dimensions (A-B-C) (mm) | Spool width (D) | Weight |
|--------------|--------------------------|----------------------|-----------------------------|--------------------------------|-------------------|-----------------|--------------------------------|-----------------------|-------------------------|-----------------|--------|
| 36471 | Painted steel | 600 bar | 1/2" (M) - 1/2" (F) | 10 mm | 1/2" | 30 m | 39502 | 9951 | 370x590x600 | 150 mm | 25 kg |
| 36470 | | | | | | 35 m | | | | | 26 kg |
| 36472 | | | | | | 40 m | | | | | 30 kg |
| 37158 | Stainless steel AISI 304 | 200 bar | 1/2" (M) - 1/2" (F) | 10 mm | 1/2" | 30 m | 39601 | 9968 | 370x590x600 | 150 mm | 25 kg |
| 37142 | | | | | | 35 m | | | | | 26 kg |
| 37159 | | | | | | 40 m | | | | | 30 kg |