

Adjustable arms series \varnothing max 1 1/4" – up to 20 m length
 \varnothing max 1 1/2" – up to 15 m length

Automatic rewind, spring-driven hose reel, **adjustable arms series**, in painted steel or in stainless steel AISI 304, suitable for applications with high delivery rates and for hoses of max 20 m length (\varnothing hose 1 1/4") or max. 15 m length (\varnothing hose 1 1/2").


The hose reel is supplied without hoses and can be used with hoses for the supply of oils, diesel, compressed air and water. From the inlet swivel joint the fluid flows through an interchangeable hose connection adapter assembly on which the hose is mounted (standard version galvanized steel, available **on demand also in stainless steel AISI 304 or AISI 316**).

Please see catalogue pages 164 and 165 for the selection of the required hoses.

On demand the hose reels can also be supplied with a **spring brake kit**; please add suffix **"/HB"** to the article number (f. ex. 36217/HB)




On demand the stainless steel hose reels can also be supplied in accordance with directive ATEX 2014/34/EU – group II – category 2.

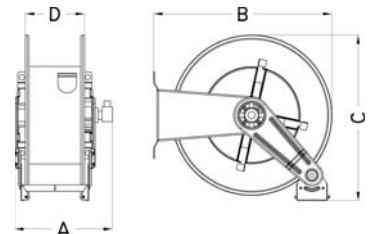

Art.no.	Material	Max working pressure	Connection threads IN - OUT	Internal \varnothing swivel joint	Max diameter hose	Max length hose	Included swivel joint	Dimensions (A-B-C) (mm)	Spool width (D)	Weight
36217	Painted steel	20 bar	1 1/2" (M) - 1 1/2" (F)	25 mm	1 1/4"	8 m	9982	430x500x490	200 mm	18 kg
36445						20 m				
36213				32 mm	1 1/2"	15 m	9983	590x670x670	400 mm	50 kg
36218				Stainless steel AISI 304	20 bar	1 1/2" (M) - 1 1/2" (F)	25 mm	1 1/4"	8 m	9982
36212	20 m									
37151	32 mm	1 1/2"	15 m				9983	590x670x670	400 mm	50 kg