

Adjustable arms series with twin spring \varnothing max 3/4" – up to 30 m length
 \varnothing max 1" – up to 20 m length

Automatic rewind, spring-driven hose reel, **adjustable arms series with twin spring**, in painted steel or in stainless steel AISI 304, suitable for hoses of max 30 m length (\varnothing hose 3/4") or max. 20 m length (\varnothing hose 1").

The wetted parts of the painted steel models on demand can also be replaced by stainless steel parts .

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, diesel, compressed air and water.

Please see catalogue pages 164 and 165 for the selection of the required hoses. On demand the hose reels can also be supplied with a **spring brake kit**; please add suffix **"/HB"** to the article number (f. ex. 36425/HB)




Art.no. **39505**
Art.no. **39500**



Art.no. **39605**
Art.no. **39602**


 On demand the stainless steel hose reels can also be supplied in accordance with directive ATEX 2014/34/EU – group II – category 2.

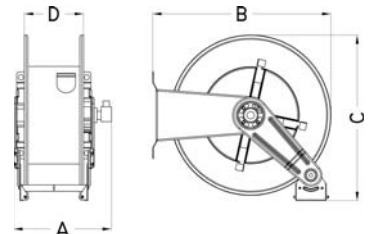

Art.no.	Material	Max working pressure	Connection threads IN - OUT	Internal diameter swivel joint	Max diameter hose	Max length hose 3/4" - 1"	Suitable pivoting wall bracket	Included swivel joint	Dimensions (A-B-C) (mm)	Spool width (D)	Weight
36475	Painted steel	100 bar	1" (M) - 1" (F)	20 mm	1"	20 m - 15 m	39505	9970F	270x600x590	150 mm	27 kg
36473						25 m - 18 m			370x640x600	200 mm	30 kg
36425						30 m - 20 m	39500		450x540x600	300 mm	38 kg
37143	Stainless steel AISI 304	100 bar	1" (M) - 1" (F)	20 mm	1"	20 m - 15 m	39605	9970	270x600x590	150 mm	27 kg
37161						25 m - 18 m			370x640x600	200 mm	30 kg
37162						30 m - 20 m	39602		450x540x600	300 mm	38 kg