


Adjustable arms series with twin spring \varnothing max 3/4" – up to 50 m length
 \varnothing max 1" – up to 30 m length


Automatic rewind, spring-driven hose reel, **adjustable arms series with twin spring**, in painted steel or in stainless steel AISI 304, suitable for applications with high delivery rates and for hoses of max 50 m length (\varnothing hose 3/4") or max. 30 m length (\varnothing hose 1"). The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water. Please see catalogue pages 164 and 165 for the selection of the required hoses. On demand the hose reels can also be supplied with a **spring brake kit**; please add suffix **"/HB"** to the article number (f. ex. 36485/HB)



Hose Reels

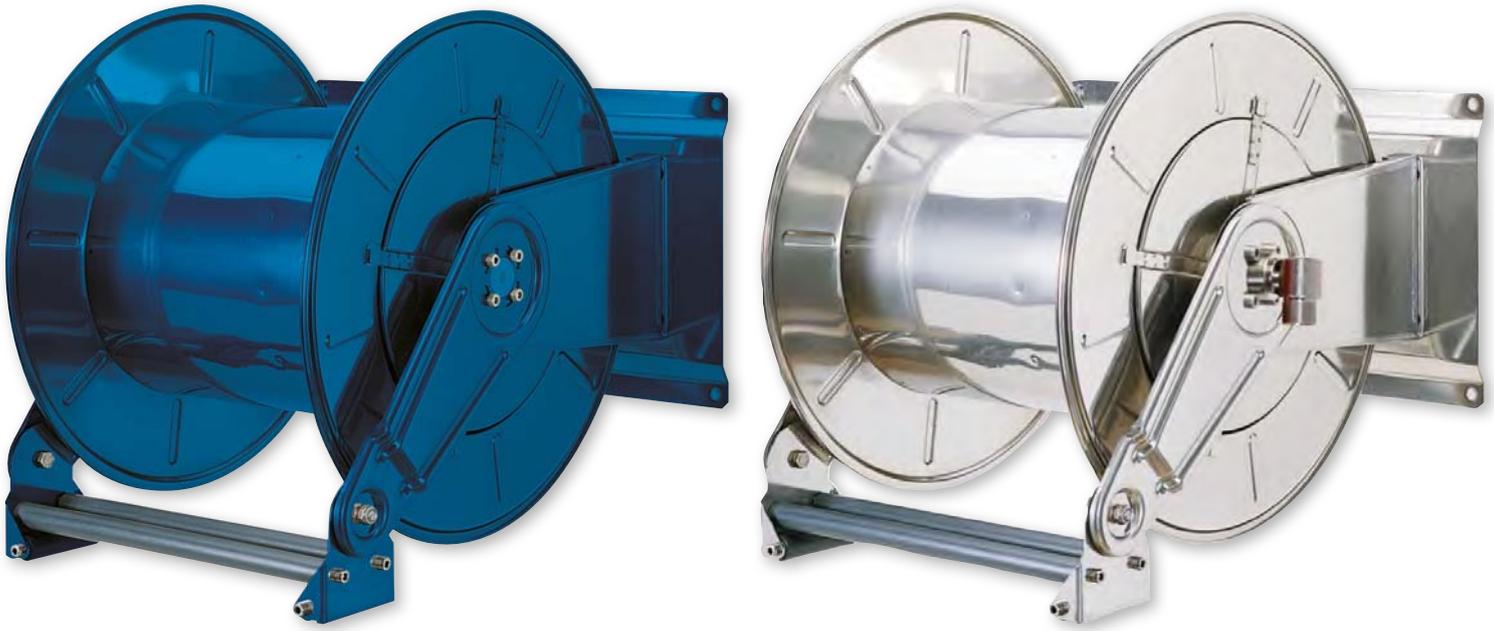

On demand the stainless steel hose reels can also be supplied in accordance with directive ATEX 2014/34/EU – group II – category 2.

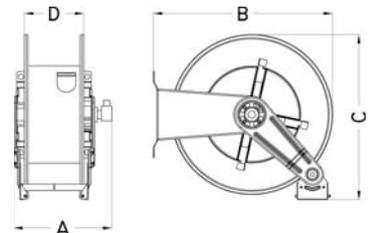

Art.no.	Material	Max working pressure	Connection threads IN - OUT	Internal \varnothing swivel joint	Max diameter hose	Max length hose	Included swivel joint	Dimensions (A-B-C) (mm)	Spool width (D)	Weight
36485	Painted steel	100 bar	1" (M) - 1" (F)	20 mm	3/4"	40 m	9970F	650x650x590	400 mm	50 kg
36483						50 m				52 kg
36484					1"	30 m				50 kg
37148					3/4"	40 m				9970
37156	Stainless steel AISI 304	50 m	52 kg							
37163		1"	30 m	50 kg						