


Art.no. **36590 - 36591**

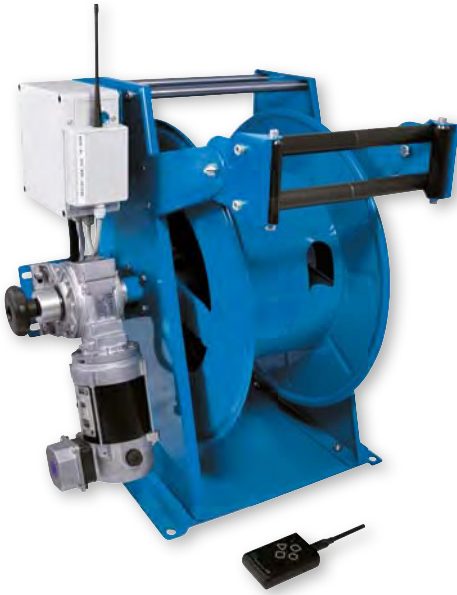

Hose reel, available in painted or in stainless steel AISI 304, with **electric 12 VDC - motor for hose rewind**. The motor is connected to an external reduction gear with clutch torque limiter. Suitable for hoses of max 100 m length in 1/2".

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, grease, antifreeze, compressed air and water.

With high frequency transmitter (433.9 MHz) with remote control to enable also an activation from a distance.

Technical data rewind system:

Voltage	Power	Torque electric motor	Current drain	Protection category	Rpm	Max torque reduction gear
12 VDC	200 W	0.6 N/m	20 A	IP 54 S2	2800	65 N/m

Art.no.	Hose reel material	Max working pressure	Connection threads IN - OUT	Max diameter hose	Max length hose 1/4" - 3/8" - 1/2"	Spool width	Included swivel joint	Weight	Dimensions (LxWxH) (mm)
36590	Painted steel	600 bar	1/2" (M) - 1/2" (F)	1/2"	130 m - 120 m - 100 m	400 mm	9951	52 kg	800x620x630
36591	Stainless steel AISI 304	200 bar					9968		

Art.no. **36592 - 36593**



Hose reel, available in painted or in stainless steel AISI 304, with **electric 12 VDC - motor for hose rewind**. The motor is connected to an external reduction gear with clutch torque limiter. Suitable for hoses of max 40 m length in 1".

The hose reel is supplied without hoses and can be used with hoses for the supply of diesel, compressed air and water.

With high frequency transmitter (433.9 MHz) with remote control to enable also an activation from a distance.

Technical data rewind system:

Voltage	Power	Torque electric motor	Current drain	Protection category	Rpm	Max torque reduction gear
12 VDC	200 W	0.6 N/m	20 A	IP 54 S2	2800	65 N/m

Art.no.	Hose reel material	Max working pressure	Connection threads IN - OUT	Internal diameter swivel joint	Max diameter hose	Max length hose 3/4" - 1"	Spool width	Included swivel joint	Weight	Dimensions (LxWxH) (mm)
36592	Painted steel	20 bar	1" (M) - 3/4" (F)	20 mm	1"	50 m - 40 m	400 mm	9970F	58 kg	800x620x630
36593	Stainless steel AISI 304							9970		