

New at Altrex:

Vari-lift personnel lift

Altrex PRO⁺

Work platform with powerless,
patented lift system



More information?



About personnel lifts

The Vari-Lift is the solution for safe and ergonomic working at lower heights. The spacious working platform offers stability and comfort, while the 360 degree safety cage protects you from falling. The patented lift system works completely without power and allows you to effortlessly rotate the platform to the desired working height. Thanks to the automatic wheel lock, the Vari-Lift stays firmly in place during use.

Compact and durably designed, the Vari-Lift is easy to move and maintenance-free. Ideal for professional applications such as installations, maintenance and facility jobs.



EN 280



Durable and practically maintenance-free

Thanks to its robust construction and smart design you can enjoy your Vari-Lift trouble-free for years. The patented lift system uses no electricity or hydraulics. As a result, the Vari-Lift has an unlimited number of lifting cycles, is long-lasting and nearly maintenance-free. Resulting in low operating costs.



Vari-lift 350 vs Vari-lift 420: which one fits your job?

The Vari-lift is the solution for safe and efficient working at height. Two models are available: the Vari-lift 350 and the Vari-lift 420. Both models feature the same patented turning mechanism that allows you to easily move the lift upwards. They also feature 360-degree fall protection and an automatic wheel lock, ensuring optimum safety and stability during use.

Yet there are some key differences.

The Vari-lift 350 is more compact and therefore easier to store. In contrast, the Vari-lift 420 offers a more spacious standing area and a working height that is 70 cm higher. In addition, the Vari-lift 420 has a larger tool tray, ideal for storing your tools while working.


In short, the Vari-lift 350 is perfect when space is an issue, while the Vari-lift 420 offers more comfort, height and practical working space. Both models combine safety and ease of use, so you can always work at height with confidence.



How-to videos

We show exactly how all models of the Vari-lift work in the product video. Watch it very easily via YouTube, so you can see it everywhere.

www.youtube.com/AltrexTV

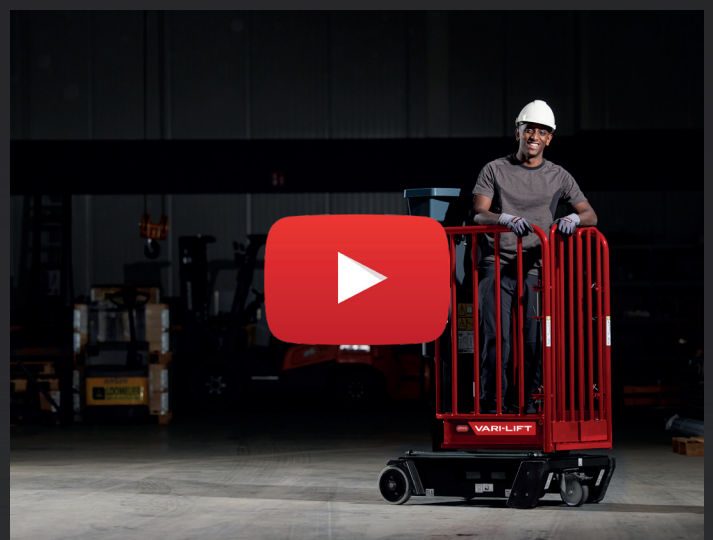


Vari-Lift

- Work platform with powerless, patented lift system
- 360 degree fall protection
- Large working platform
- Compact, fits through a doorway
- Easy to move thanks to large wheels
- For indoor use only
- For intensive, professional use

More information?

Want more information of the Vari-Lift? Scan the QR code or go to altrex.com/en/vari-lift.



Vari-Lift. Maximum safety and comfort at height

The Vari-Lift makes safe working at height easier than ever. The safety cage ensures that you are always enclosed and enjoy 360-degree fall protection. With the turning mechanism, you lift the work platform without effort, precisely to the height you want. This is all possible thanks to the patented lift system. Completely powerless.

Finished the job? Thanks to the Vari-Lift's large wheels and compact size, you can easily move it to the next workstation. The wheels also lock automatically when you enter, so that you don't roll away unexpectedly. Safety guaranteed.

The Vari-Lift passenger lift is the perfect climbing solution for professional jobs at lower heights, where safe and ergonomic working is a top priority. For example, in installation, maintenance and facility work. All Vari-Lifts are EN 280 certified.

VARILIFT - personnel lift

Description	Art.no.	Storage width (m)	Storage length (m)	Storage height (m)	Max. standing height (m)	Max. working height (m)	Weight (kg)
Vari-lift 350	583000	0.70	0.98	1.55	1.50	3.50	196
Vari-lift 420	583001	0.74	1.28	1.94	2.20	4.20	319

Complying with ATEX zone 1 and 21 or looking for a Vari-Lift for outdoor use? Ask about the possibilities.





www.altrex.com

Altrex B.V.

P.O. Box 30160
8003 CD Zwolle
The Netherlands
Tel.: +31 38 455 77 33
sales@altrex.com

Misprints and printing errors reserved. The products, specifications and versions mentioned in this leaflet may change in the meantime.