
Installation Instructions

RAPID RESPONSE™ PIPE REPAIR SYSTEM














1 Maritime Court, Gillman SA 5013 Phone: +61 8 8241 0888 sales@precise-amg.com.au www.valleypreciseglobal.com Ph: Greg Daye +61 (0) 4 0996 4540 Fax: +61 (0) 8 8241 0850 gdaye@precise-amg.com.au www.precise-amg.com

Safety Instructions

RAPID RESPONSE™ PIPE REPAIR SYSTEM

WARNING: This product does not retain axial pipe movement. This product does not repair a full circumferential pipe leak.

	IMPORTANT SAFETY POINTS
1	Wear safety glasses during installation.
2	Using Adjusting Nut, don't over-tighten the tension chain when adjusting clamp to suit pipe diameter.
3	Don't use pipe or extension bar (excessive force) on the handle to lock clamp.
4	Make sure tension chain doesn't get twisted during installation
5	Keep hand and fingers clear of pinch points on clamp while locking the handle.
6	Ensure the "TENSION CHAIN" is on the "CHAIN HOOK" correctly before locking handle.
7	Use caution when installing clamp to avoid any damage to the membrane seal.
8	If using copper sheet and clamps combined, use protective gloves to avoid injury.

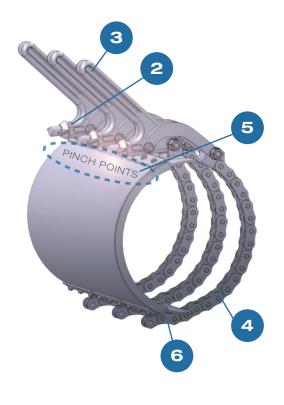



1 Maritime Court, Gillman SA 5013 Phone: +61 8 8241 0888 sales@precise-amg.com.au www.valleypreciseglobal.com Ph: Greg Daye +61 (0) 4 0996 4540 Fax: +61 (0) 8 8241 0850 gdaye@precise-amg.com.au www.precise-amg.com