

Adjustable arms series \varnothing max 3/4" – up to 18 m length
 \varnothing max 1" – up to 15 m length

Automatic rewind, spring-driven hose reel, **adjustable arms series**, in painted steel or in stainless steel AISI 304, suitable for hoses of max 18 m length (\varnothing hose 3/4") or max. 15 m length (\varnothing hose 1").

The wetted parts of the painted steel models on demand can also be replaced by stainless steel parts .

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, diesel, compressed air and water.

Please see catalogue pages 164 and 165 for the selection of the required hoses.

On demand the hose reels can also be supplied with a **spring brake kit**; please add suffix **"/HB"** to the article number (f. ex. 36200B/HB)



Art.no. **39502**
Art.no. **39500**




Art.no. **39602**
Art.no. **39601**

Hose Reels



On demand the stainless steel hose reels can also be supplied in accordance with directive ATEX 2014/34/EU – group II – category 2.

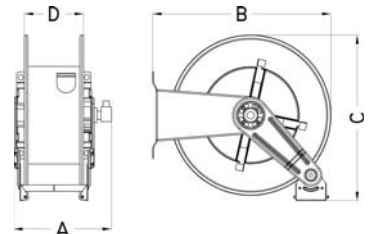

Art.no.	Material	Max working pressure	Connection threads IN - OUT	Internal diameter swivel joint	Max diameter hose	Max length hose 3/4" - 1"	Suitable pivoting wall bracket	Included swivel joint	Dimensions (A-B-C) (mm)	Spool width (D)	Weight				
36200B	Painted steel	100 bar	1" (M) - 1" (F)	20 mm	1"	10 m - 8 m	39502	9970F	270x500x490	150 mm	14 kg				
36215						15 m -12 m			305x490x490	200 mm	22 kg				
36800						18 m -15 m	39500		505x530x500	300 mm	24 kg				
37150	Stainless steel AISI 304					100 bar	1" (M) - 1" (F)	20 mm	1"	10 m - 8 m	39601	9970	270x500x490	150 mm	14 kg
37155										15 m -12 m			305x490x490	200 mm	22 kg
37160										18 m -15 m	39602		505x530x500	300 mm	24 kg