

Adjustable arms series \varnothing max 1 1/4" – up to 20 m length
 \varnothing max 1 1/2" – up to 15 m length

Automatic rewind, spring-driven hose reel, **adjustable arms series**, in painted steel or in stainless steel AISI 304, suitable for applications with high delivery rates and for hoses of max 20 m length (\varnothing hose 1 1/4") or max. 15 m length (\varnothing hose 1 1/2").


The hose reel is supplied without hoses and can be used with hoses for the supply of oils, diesel, compressed air and water. From the inlet swivel joint the fluid flows through an interchangeable hose connection adapter assembly on which the hose is mounted (standard version galvanized steel, available **on demand also in stainless steel AISI 304 or AISI 316**).

Please see catalogue pages 172 and -173 for the selection of the required hoses.

On demand the hose reels can also be supplied with a **spring brake kit**; please add suffix **"/HB"** to the article number (f. ex. 36217/HB)




On demand the stainless steel hose reels can also be supplied in accordance with directive ATEX 2014/34/EU – group II – category 2.

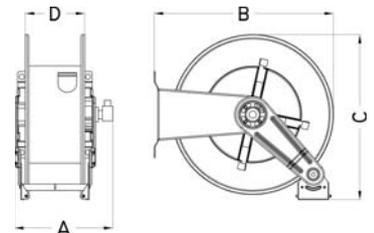

| Art.no. | Material | Max working pressure | Connection threads IN - OUT | Internal \varnothing swivel joint | Max diameter hose | Max length hose | Included swivel joint | Dimensions (A-B-C) (mm) | Spool width (D) | Weight |
|--------------|--------------------------|----------------------|-----------------------------|-------------------------------------|-------------------|-----------------|-----------------------|-------------------------|-----------------|--------|
| 36217 | Painted steel | 20 bar | 1 1/4" (M) | 25 mm | 1 1/4" | 8 m | 9980 | 430x500x490 | 200 mm | 18 kg |
| 36445 | | | 1 1/4" (M) | | | 20 m | | | | |
| 36213 | | | 1 1/4" (M) | 32 mm | 1 1/2" | 15 m | 9849 | 590x670x670 | 400 mm | 50 kg |
| 36218 | | | 1 1/2" (M) | | | | | | | |
| 36212 | Stainless steel AISI 304 | 20 bar | 1 1/4" (M) | 25 mm | 1 1/4" | 8 m | 9946 | 430x500x490 | 200 mm | 18 kg |
| 36212 | | | 1 1/4" (M) | | | 20 m | | | | |
| 37151 | | | 1 1/4" (M) | 32 mm | 1 1/2" | 15 m | 9945 | 590x670x670 | 400 mm | 50 kg |
| | 1 1/2" (M) | | | | | | | | | |